



SCHEMA TECNICA/TECHNICAL

Tesnit BA-M

(particolari/Guarnizioni realizzate con processo di taglio da lastra con queste caratteristiche)

Engineered bio-soluble mineral fibres, aramid fibres, inorganic fillers and NBR binder. Material with excellent thermal resistance and mechanical properties (Especially bolt torque retention), which allow to be utilised in a very wide range of applications, particularly steam system.

APPLICATIONS

Potable water, Steam, Gas, Petrochemical, food, paper and cellulose industry, shipbuilding, power plant, refrigeration and cooling, heating system, high temp application.

TECHNICAL DATA

Colour			Gray/green
Density	DIN 28090-2	G/cm ³	1,7
Compressibility	ASTM F36J	%	10
Recovery	ASTM F36J	%	60
Tensile strength	ASTM F152	MPa	13
Stress Resistance:	DIN 52913		
16h, 50MPa, 175°C		Mpa	35
16h, 50MPa, 300°C		MPa	27
Specific leak rate	DIN 3535-6	Mg/(s - m)	0,05
Thickness increase:	ASTM F146		
Oil IRM 903, 5h, 150°C		%	5
ASDTM Fuel B, 5h, 23°C		%	6
Compression modulus:	DIN 28090-2		
At room temperature: ϵ_{KRW}		%	10,8
At elevated temperature: $\epsilon_{WRW/200^\circ C}$		%	11,0
Max. operating Condition:			
Peak temperature		°C	440
Continuous temperature		°C	350
-with steam		°C	300
Pressure		bar	120

SUPPLY CONDITIONS

Antistick surface (4AS).

Tolerances:


- On thickness up to 1 mm (+/-0,1 mm)
- On thickness above 1.0 mm (+/-10%)

APPROVALS

(DIN DVGW DIN3535-6) - (DVGW VP 401) - (DVGW KTW) - (BAM (Oxygen)) - (TA-LUFT (VDI 2440)) - (WRAS) - **EU1935/2004** (Uso come guarnizione per tubatura - vedi direttiva BfR XXI Cat.4 Point 2.4.1 - Vedi certificazione)

P-T DIAGRAM

EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 2.0 mm

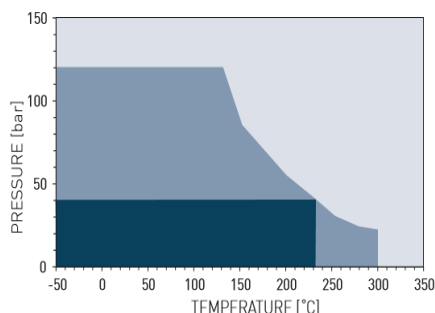

- General suitability - Under common installation practices and chemical compatibility.
- Conditional suitability - Appropriate measures ensure maximum performance for joint design and gasket installation. Technical consultation is recommended.
- Limited suitability - Technical consultation is mandatory.

ATTENZIONE: Valori ricavati da test eseguiti su normale giunto flangiato dove la superficie di appoggio è molto maggiore dello spessore. Per guarnizioni dalla fascia piccolina (Esempio raccorderia, ...) occorre fare i test sul campo.

Values derived from tests performed on a normal flanged joint where the surface of the support is much greater than the thickness. For small-band gaskets (for example fittings, ...), specific application tests must be performed.

CHEMICAL RESISTANCE CHART

The recommendations made here are intended to be a guideline for selection of the suitable gasket quality. Because the function and durability of the products depend upon a number of factor, the data may not be used to support any warranty claims.

- + Raccomandato
- ? Raccomandazione dipende dalle condizioni di esercizio
- - Non raccomandato

Acetamide	+	Dioxane	-	Oleic acid	+
Acetic acid, 10%	+	Diphenyl (Dowtherm A)	+	Oleum (Sulfuric acid, fuming)	-
Acetic acid, 100% (Glacial)	-	Esters	?	Oxalic acid	?
Acetone	?	Ethane (gas)	+	Oxygen (gas)	-
Acetonitrile	-	Ethers	?	Palmitic acid	+
Acetylene (gas)	+	Ethyl acetate	?	Paraffin oil	+
Acid chlorides	-	Ethyl alcohol (Ethanol)	+	Pentane	+
Acrylic acid	?	Ethyl cellulose	?	Perchloroethylene	-
Acrylonitrile	-	Ethyl chloride (gas)	-	Petroleum (Crude oil)	+
Adipic acid	+	Ethylene (gas)	+	Phenol (Carbolic acid)	-
Air (gas)	+	Ethylene glycol	+	Phosphoric acid, 40%	?
Alcohols	+	Formaldehyde (Formalin)	?	Phosphoric acid, 85%	-
Aldehydes	?	Formamide	?	Phthalic acid	+
Alum	+	Formic acid, 10%	+	Potassium acetate	+
Aluminium acetate	+	Formic acid, 85%	?	Potassium bicarbonate	+
Aluminium chloride	?	Formic acid, 100%	-	Potassium carbonate	+
Aluminium chloride	?	Freon-12 (R-12)	+	Potassium chloride	+
Aluminium sulfate	?	Freon-134a (R-134a)	+	Potassium cyanide	+
Amines	-	Freon-22 (R-22)	?	Potassium dichromate	?
Ammonia (gas)	?	Fruit juices	+	Potassium hydroxide	?
Ammonium bicarbonate	+	Fuel oil	+	Potassium iodide	+
Ammonium chloride	+	Gasoline	+	Potassium nitrate	+
Ammonium hydroxide	+	Gelatin	+	Potassium permanganate	?
Amyl acetate	?	Glycerine (Glycerol)	+	Propane (gas)	+
Anhydrides	?	Glycols	+	Propylene (gas)	+
Aniline	-	Helium (gas)	+	Pyridine	-
Anisole	?	Heptane	+	Salicylic acid	?
Argon (gas)	+	Hydraulic oil (Glycol based)	+	Seawater/brine	+
Asphalt	+	Hydraulic oil (Mineral type)	+	Silicones (oil/grease)	+
Barium chloride	+	Hydraulic oil (Phosphate ester based)	?	Soaps	+
Benzaldehyde	-	Hydrazine	-	Sodium aluminate	+
Benzene	+	Hydrocarbons	+	Sodium bicarbonate	+
Benzoic acid	?	Hydrochloric acid, 10%	?	Sodium bisulfite	+
Bio-diesel	+	Hydrochloric acid, 37%	-	Sodium carbonate	+
Bio-ethanol	+	Hydrofluoric acid, 10%	-	Sodium chloride	+
Black liquor	?	Hydrofluoric acid, 48%	-	Sodium cyanide	+
Black liquor	?	Hydrofluoric acid, 48%	-	Sodium cyanide	+
Borax	+	Hydrogen (gas)	+	Sodium hydroxide	?
Boric acid	+	Iron sulfate	+	Sodium hypochlorite (Bleach)	?
Butadiene (gas)	+	Isobutane (gas)	+	Sodium silicate (Water glass)	+
Butane (gas)	+	Isocetane	+	Sodium sulfate	+
Butyl alcohol (Butanol)	+	Isoprene	+	Sodium sulfide	+
Butyric acid	+	Isopropyl alcohol (Isopropanol)	+	Starch	+
Calcium chloride	+	Kerosene	+	Steam	+
Calcium hydroxide	+	Ketones	?	Stearic acid	+
Carbon dioxide (gas)	+	Lactic acid	?	Styrene	?
Carbon monoxide (gas)	+	Lead acetate	+	Sugars	+
Cellosolve	?	Lead arsenate	+	Sulfur	?
Chlorine (gas)	-	Magnesium sulfate	+	Sulfur dioxide (gas)	?
Chlorine (in water)	-	Maleic acid	?	Sulfuric acid, 20%	-
Chlorobenzene	?	Malic acid	?	Sulfuric acid, 98%	-
Chloroform	-	Methane (gas)	+	Sulfuryl chloride	-
Chloroprene	?	Methyl alcohol (Methanol)	+	Tar	+
Chlorosilanes	-	Methyl chloride (gas)	?	Tartaric acid	?
Chromic acid	-	Methylene dichloride	?	Tetrahydrofuran (THF)	-
Citric acid	?	Methyl ethyl ketone (MEK)	?	Titanium tetrachloride	-
Copper acetate	+	N-Methyl-pyrrolidone (NMP)	?	Toluene	+
Copper sulfate	+	Milk	+	2,4-Toluenediisocyanate	?
Creosote	?	Mineral oil (ASTM no.1)	+	Transformer oil (Mineral type)	+
Cresols (Cresylic acid)	-	Motor oil	+	Trichloroethylene	-
Cyclohexane	+	Naphtha	+	Vinegar	+
Cyclohexanol	+	Nitric acid, 10%	-	Vinyl chloride (gas)	-
Cyclohexanone	?	Nitric acid, 65%	-	Vinylidene chloride	-
Decalin	+	Nitrobenzene	-	Water	+
Dextrin	+	Nitrogen (gas)	+	White spirits	+
Dibenzyl ether	?	Nitrous gases (NOx)	?	Xylenes	+
Dibutyl phthalate	?	Octane	+	Xylenol	-
Dimethylacetamide (DMA)	?	Oils (Essential)	+	Zinc sulfate	+
Dimethylformamide (DMF)	?	Oils (Vegetable)	+		